

Movement Joints (UK) Ltd

P O Box 10, Wisbech, Cambridgeshire PE13 4AN

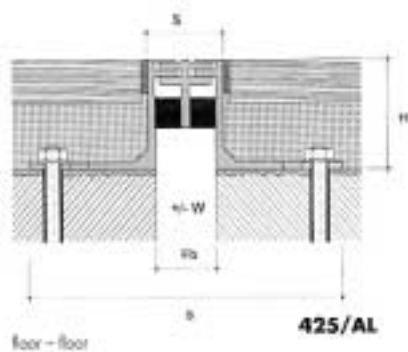
Tel: 01945 450736 Fax: 01945 450819

Web: www.mjuk.co.uk



e-mail: info@mjuk.co.uk

425/AL Floor Series

All Metal



Also available as a floor to wall/corner profile

Profile Number	425/AL
Fb - Joint widths up to (mm)	35
H - Heights (mm)	60
B - Overall width (mm)	175
S - Visible width (mm)	43
Accommodation of movement (mm)	16 (+/-8)
Colour	Natural
Material	Aluminium, cellular rubber
Standard Length (metres)	4
Load Bearing capacity (kN)	 120 kN  35 kN

Applications:

For all finishes (Screed, natural stone, cast stone etc)

Profile characteristics:

Smooth surface, attractive design, high movement absorption

Profile installation:

See tips for planning and installation

IMPORTANT

Whilst all reasonable care is taken in compiling technical data on the company's products, all recommendations or suggestions regarding the use of such products are made without guarantee since the conditions of use are beyond the company. It is the customers responsibility to satisfy himself that each product is fit for the purpose for which he intends to use it and that the actual conditions of use are suitable.

