

Movement Joints (UK) Ltd

P O Box 10, Wisbech, Cambridgeshire PE13 4AN


Tel: 01945 450736 Fax: 01945 450819

Web: www.mjuk.co.uk


e-mail: info@mjuk.co.uk

426/ALRV +426/ALGV Floor Series

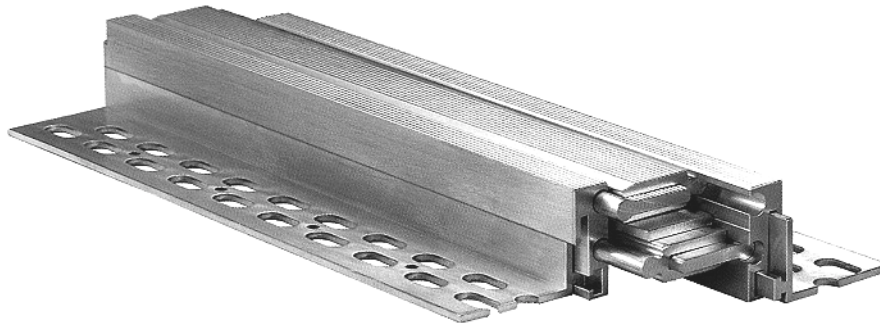



All metal

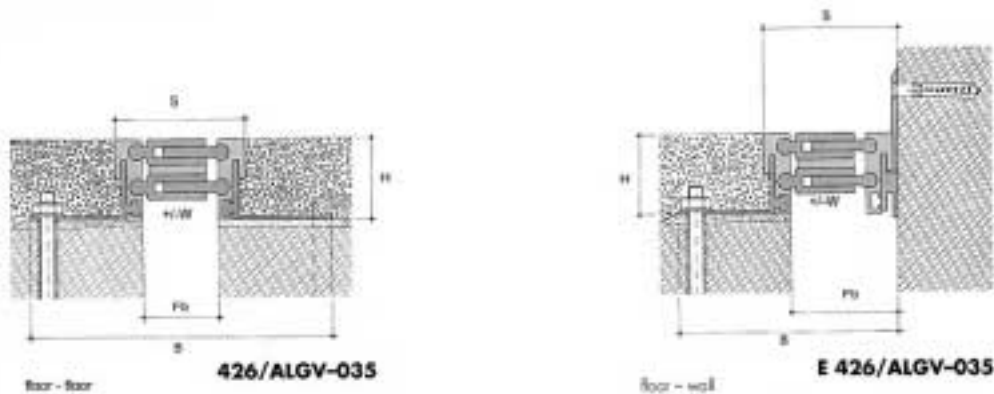

ALGV = Smooth surface
ALRV = Grooved surface



Higher movement capabilities are available e.g. 426/ALRV-SP +/-50mm

Profile Number	426/ALGV-035 426/ALRV-035	426/ALGV-050 426/ALRV-050	426/ALRV-080	426/ALRV-100
Fb - Joint widths up to (mm)	35	50	80	100
H - Heights (mm)	43/58	43/48*/58/63*/68/88		
B - Overall width (mm)	155	155/175*	180/200*	225/245*
S - Visible width (mm)	70	70	95	135
Accommodation of movement (mm)	10 (+/-5)	10 (+/-5)	20 (+/-10)	30 (+/-15)
Colours	natural			
Material	aluminium			
Standard Length (metres)	4			
Load Bearing capacity (kN)				

Applications:

For all finishes (Screed, natural stone, cast stone etc)

Profile characteristics:

Attractive design, heavy duty, high load bearing capacity

Profile installation:

See tips for planning and installation

IMPORTANT

Whilst all reasonable care is taken in compiling technical data on the company's products, all recommendations or suggestions regarding the use of such products are made without guarantee since the conditions of use are beyond the company. It is the customers responsibility to satisfy himself that each product is fit for the purpose for which he intends to use it and that the actual conditions of use are suitable.

