


# 426/G SERIES

## Aluminium with rubber insert

For use in  
hospitals • airports • shopping centres • rail stations  
• sport stadiums • schools

### Features:


- Attractive finish
- Solid aluminium construction with Nitriflex rubber insert
- Insert colours: black or grey. Alternative RAL coloured inserts are available - minimum order quantity applies.
- Standard 4 metre lengths
- Floor to wall options
- Ability to mix leg heights to accommodate differing screed depths

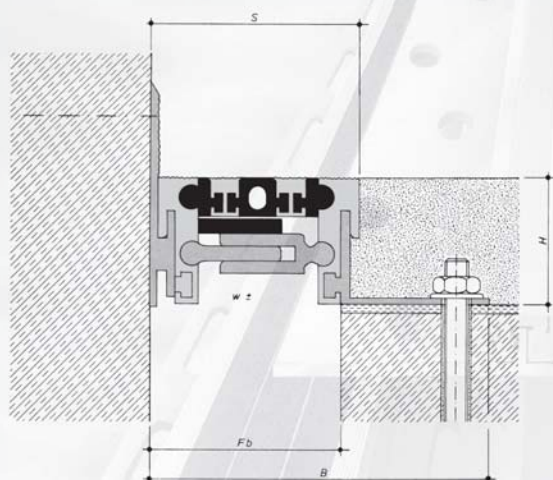






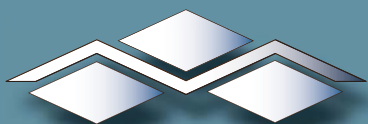
Floor to wall options available
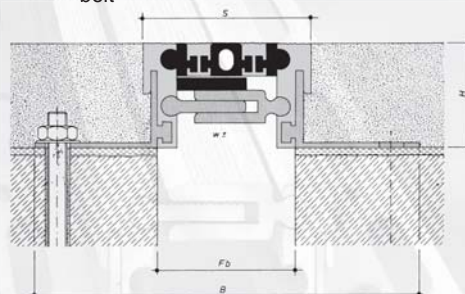
### Installation:

Laid on to epoxy mortar levelling bed, nominal 10mm deep and mechanically fixed symmetrically at 300mm centres, with M8 x 110mm resin anchor fixing or M10 concrete self tapping type bolt



Profile reference	426/G-050	426/G-080	426/G-100
Fb - Joint widths upto (mm)	50mm	80mm	100mm
H - Heights (mm)	43, 48*, 58, 63*, 68, 88, 108 mm	43, 48*, 58, 63*, 68, 88, 108 mm	43, 48*, 58, 63*, 68, 88, 108 mm
B - Overall width (mm)	160 or 180*mm (wider profiles for heights marked *)	180 or 200*mm (wider profiles for heights marked *)	200 or 220*mm (wider profiles for heights marked *)
S - Visible width (mm)	70mm	90mm	110mm
Accommodation of movement (mm)	6mm (+/-3mm)	8mm (+/- 4mm)	16mm (+/- 8mm)
Material	Aluminium & Nitriflex	Aluminium & Nitriflex	Aluminium & Nitriflex
Load Bearing capacity (kN)	  70kN	  25kN	



**Movement Joints (UK) Ltd,**  
Unit 3, 57 Thorby Avenue, March, Cambridgeshire PE15 0AZ United Kingdom  
Tel: 01354 60 79 60 Fax: 01354 60 78 33  
Web: [www.mjuk.co.uk](http://www.mjuk.co.uk) e-mail: [info@mjuk.co.uk](mailto:info@mjuk.co.uk)

**IMPORTANT:** Whilst all reasonable care is taken in compiling technical data on the company's products, all recommendations or suggestions regarding the use of such products are made without guarantee since the conditions of use are beyond the company. It is the customers responsibility to satisfy himself that each product is fit for the purpose for which he intends to use it and that the actual conditions of use are suitable.