

Movement Joints (UK) Ltd

P O Box 10, Wisbech, Cambridgeshire PE13 4AN
 Tel: 01945 450736 Fax: 01945 450819
 Web: www.mjuk.co.uk
 e-mail: info@mjuk.co.uk

426/NALG + NALR

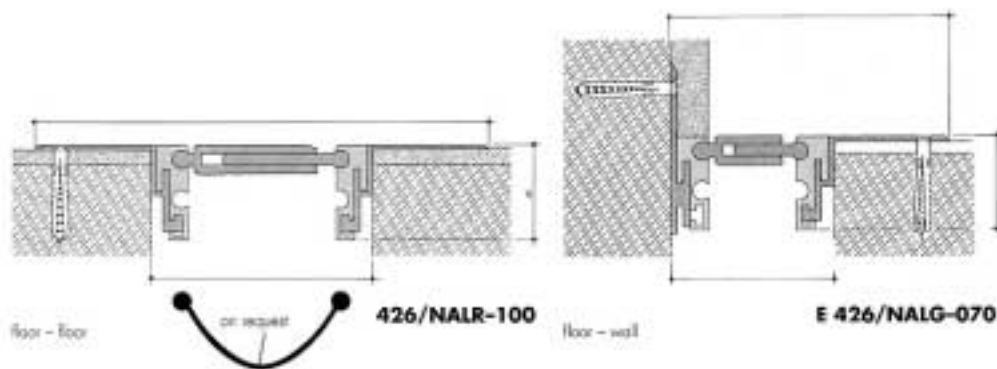
Floor Series

All metal





Optional vapour barrier can be delivered separately as one length (no interruption at butt joints), as well as a drainage appliance.

NALG = Smooth surface finish
NALR = Grooved surface finish



Note: Higher movement capabilities are available e.g. 426/NALR-SP +/-50mm

Profile Number	426/NALG-070	426/NALR-070	426/NALR-100
Fb - Joint widths minimum (mm)	70	70	100
H - Heights (mm)	43		
B - Overall width (mm)	175	175	200
S - Visible width (mm)	175	175	200
Accommodation of movement (mm)	10 (+/-5)	10 (+/-5)	20 (+/-10)
Colours	NATURAL		
Material	aluminium		
Standard Length (metres)	4		
Load Bearing capacity (kN)	 25 kN		

- Applications:** For all finishes (Screed, natural stone, cast stone etc)
- Profile characteristics:** Smooth surface, attractive design, high load bearing capacity
- Profile installation:** See tips for planning and installation

IMPORTANT

Whilst all reasonable care is taken in compiling technical data on the company's products, all recommendations or suggestions regarding the use of such products are made without guarantee since the conditions of use are beyond the company. It is the customers responsibility to satisfy himself that each product is fit for the purpose for which he intends to use it and that the actual conditions of use are suitable.

