

## Movement Joints (UK) Ltd

P O Box 10, Wisbech, Cambridgeshire PE13 4AN  
Tel: 01945 450736 Fax: 01945 450819  
Web: [www.mjuk.co.uk](http://www.mjuk.co.uk)  
e-mail: [info@mjuk.co.uk](mailto:info@mjuk.co.uk)


445/e + 445/m

## Floor Series


Stainless steel + brass capped  
Metal and Nitriflex®



Floor to wall/corner profile available

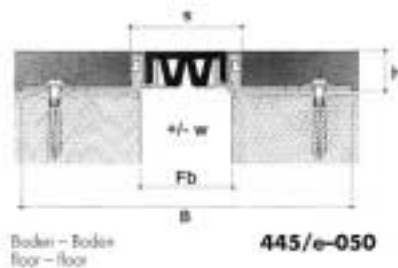

Smooth insert option shown

Profile Number	445/e-050	445/m-050
Fb - Joint widths up to (mm)	50	50
H - Height (mm)	21 / 26 / 36 / 51	
B - Overall width (mm)	180	
S - Visible width (mm)	62	
Accommodation of movement (mm)	20 (+/- 10)	
Insert Colours	Black, grey	
Material	Aluminium, Nitriflex®, stainless steel	Aluminium, Nitriflex®, brass
Standard Length (metres)	4	
Load Bearing capacity (kN)	 25 kN	

### Applications:

For all finishes (Screed, natural stone, cast stone etc)

### Profile characteristics

Attractive stainless steel or brass capped finish, smooth insert available, alternative colours available.

### Profile installation:

See tips for planning and installation

#### IMPORTANT

Whilst all reasonable care is taken in compiling technical data on the company's products, all recommendations or suggestions regarding the use of such products are made without guarantee since the conditions of use are beyond the company. It is the customer's responsibility to satisfy himself that each product is fit for the purpose for which he intends to use it and that the actual conditions of use are suitable.

