


Movement Joints (UK) Ltd

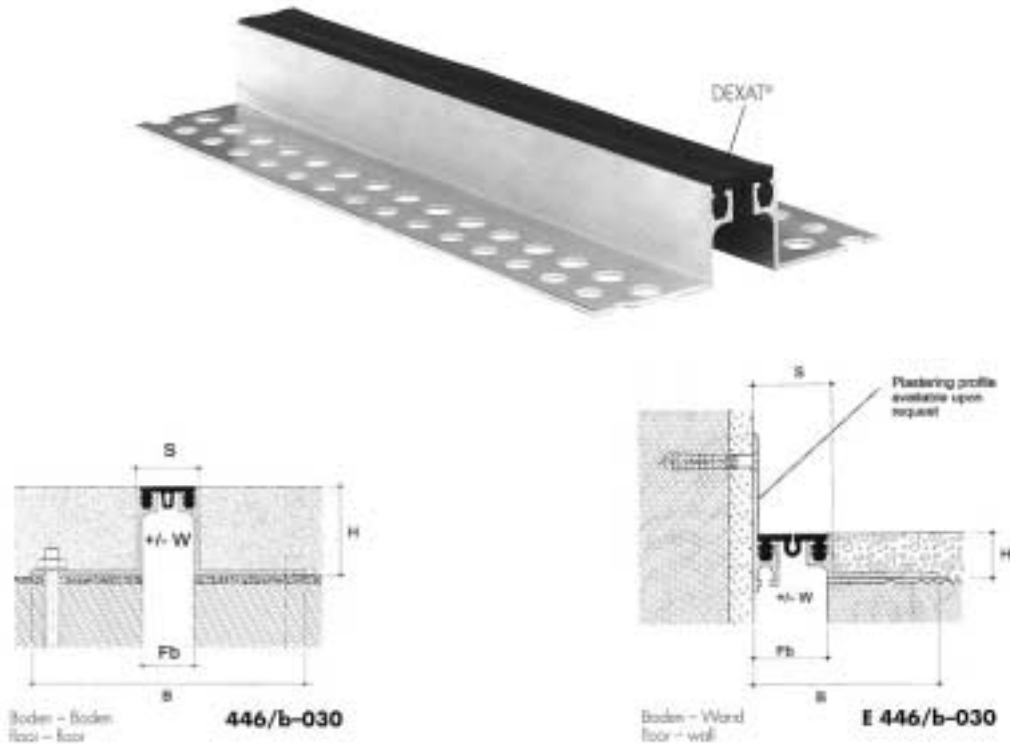

P O Box 10, Wisbech, Cambridgeshire PE13 4AN
 Tel: 01945 450736 Fax: 01945 450819
 Web: www.mjuk.co.uk
 e-mail: info@mjuk.co.uk

446/a + b Floor Series

Metal and Nitriflex®



Options: 446/Ta has a 3mm raised insert for vinyl floor finish. 446/Tb has a 5mm raised insert for carpet floor covering. The 446/Ta can be welded to vinyl floor coverings. To specify replace 446/a (b) with 446/Ta (Tb) prefix e.g. 446/Ta-050
 446/a & 446/b are also available with 3mm brass plate finish – see 446/Tbm.

Profile Number	446/a-020	446/b-030	446/b-050	446/b-065
Fb - Joint widths up to (mm)	20	30	50	65
H - Heights (mm)	20/35	15/20/26/35/50	26/35/80	26/35/80
B - Overall width (mm)	121	125	150	165
S - Visible width (mm)	21	30	50	65
Accommodation of movement (mm)	5 (+/-2.5)	10 (+/-5)	14 (+/-7)	20 (+/-10)
Insert colours	Black & grey (other colours available)			
Material	Aluminium, Nitriflex®			
Standard Length (metres)	4			
Load Bearing capacity (kN)	 25 kN			

- Applications:** For all finishes (Screed, natural stone, cast stone etc)
- Profile characteristics** interchangeable insert, attractive design, smooth surface insert available
- Profile installation:** See tips for planning and installation

IMPORTANT
 Whilst all reasonable care is taken in compiling technical data on the company's products, all recommendations or suggestions regarding the use of such products are made without guarantee since the conditions of use are beyond the company. It is the customers responsibility to satisfy himself that each product is fit for the purpose for which he intends to use it and that the actual conditions of use are suitable.

