

Movement Joints (UK) Ltd

P O Box 10, Wisbech, Cambridgeshire PE13 4AN


Tel: 01945 450736 Fax: 01945 450819

Web: www.mjuk.co.uk

e-mail: info@mjuk.co.uk

446/c Floor Series

Metal and Nitriflex

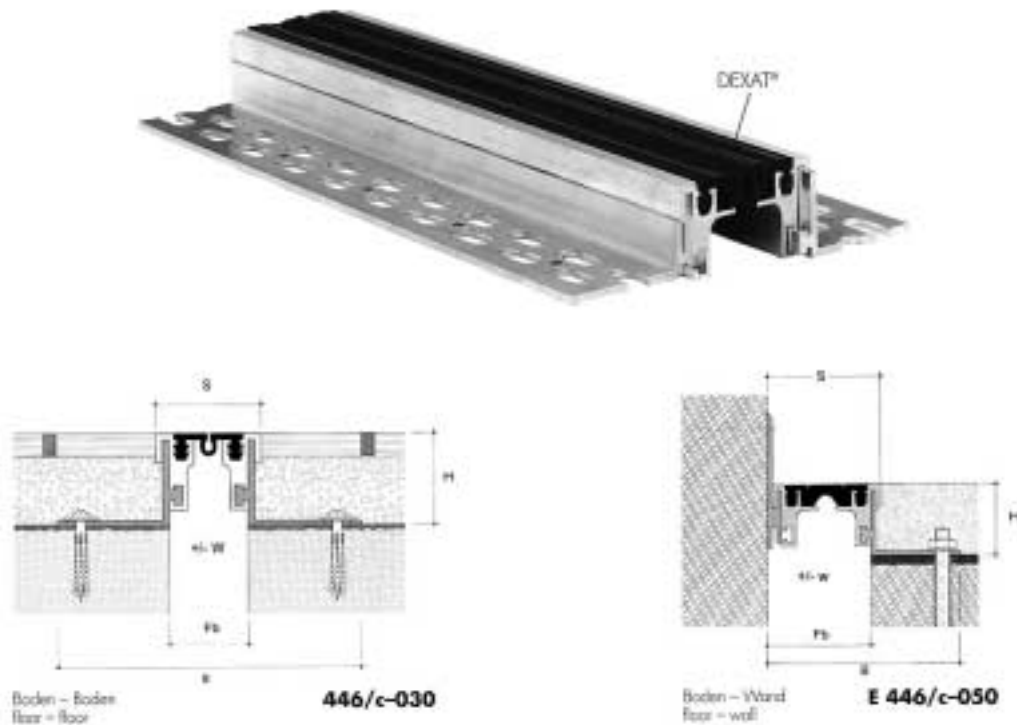



Options: Tb & Tc inserts are available for 30mm and 50mm joint widths

446/Tc has a 3mm raised insert for vinyl floor finish. 446/Tb has a 5mm raised insert for carpet floor covering.

The 446/Tc can be welded to vinyl floor coverings. To specify replace prefix 446/c with 446/Tc e.g. 446/Tc-050

446/c-030 and 446/c-050 are also available with 3mm brass capped finish – see 446/Tcm.

Profile Number	446/c-030	446/c-050	446/c-065	446/c-100
Fb - Joint widths up to (mm)	30	50	65	100
H - Heights (mm)	35/40*/50/55*/60/80			
B - Overall width (mm)	135/155*	150/170*	170/190*	205/225*
S - Visible width (mm)	45	65	80	115
Accommodation of movement (mm)	10 (+/-5)	14 (+/-7)	20 (+/-10)	30 (+/-15)
Insert colours	Black, grey (other colours available)			
Material	Aluminium, Nitriflex®			
Standard Length (metres)	4			
Load Bearing capacity (kN)	 35 kN		 25 kN	

Applications: For all finishes (Screed, natural stone, cast stone etc)

Profile characteristics Interchangeable insert, attractive design, smooth surface insert available

Profile installation: See tips for planning and installation

IMPORTANT

Whilst all reasonable care is taken in compiling technical data on the company's products, all recommendations or suggestions regarding the use of such products are made without guarantee since the conditions of use are beyond the company. It is the customers responsibility to satisfy himself that each product is fit for the purpose for which he intends to use it and that the actual conditions of use are suitable.

