

## Movement Joints (UK) Ltd

P O Box 10, Wisbech, Cambridgeshire PE13 4AN


Tel: 01945 450736 Fax: 01945 450819

Web: [www.mjuk.co.uk](http://www.mjuk.co.uk)

e-mail: [info@mjuk.co.uk](mailto:info@mjuk.co.uk)

## 446/N Series

Surface fixed floor  
expansion joint

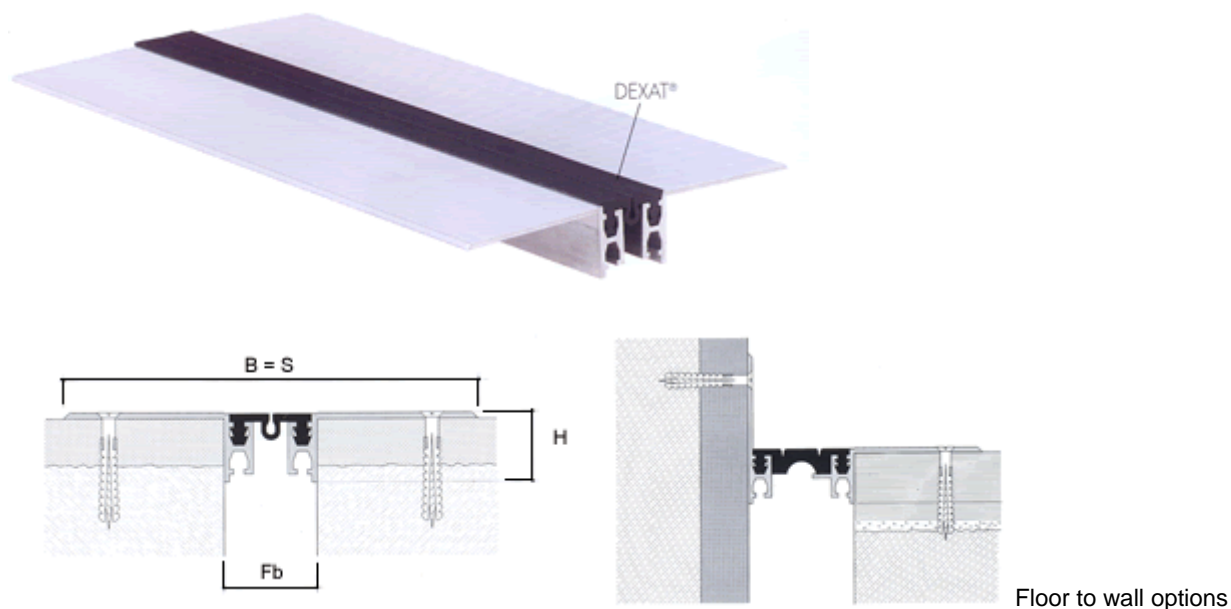

- Options:
- 1) smooth insert for clean areas
  - 2) profiles for vinyl and carpet floor finishes available – refer to 446/Tn data sheets

Profile Number	446/N-020	446/N-030	446/N-050	446/N-065
Fb – Minimum joint width (mm)	20	30	50	65
H – Heights (mm)	17	26	26	26
B – Overall width (mm)	120	150	175	185
S - Visible width (mm)	120	150	75	185
Accommodation of movement (mm)	6 (+/-3)	10 (+/-5)	14 (+/-7)	20 (+/-10)
Insert colours	black, grey (other colours available)			
Material	Aluminium, Nitriflex®			
Standard Length (metres)	4			
Load Bearing capacity (kN)				

**Applications:** For all finishes (Screed, natural stone, cast stone etc)

**Profile characteristics:** For subsequent installation, smooth surface option, replaceable inserts

**Profile installation:** See tips for planning and installation

**IMPORTANT**

Whilst all reasonable care is taken in compiling technical data on the company's products, all recommendations or suggestions regarding the use of such products are made without guarantee since the conditions of use are beyond the company. It is the customers responsibility to satisfy himself that each product is fit for the purpose for which he intends to use it and that the actual conditions of use are suitable.

