

# 488 SERIES

## Aluminium & Nitriflex Floor Profile


For use in  
hospitals • airports • shopping centres • rail stations  
• offices • schools



### Features:


- Suitable for all types of flooring environments
- Solid aluminium construction with Nitriflex rubber insert
- Insert colours: black or grey. Alternative RAL coloured inserts are available - minimum order quantity applies.
- Standard 4 metre lengths
- Floor to wall options
- Insert may be supplied in lengths up to 20 metres

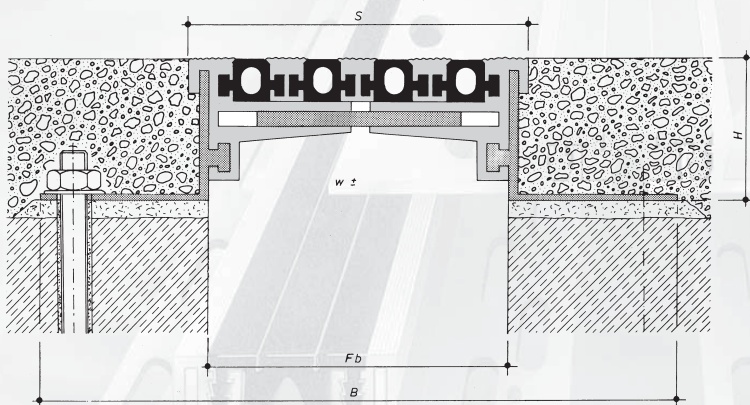

Floor to wall options available



Profile reference	488-080	488-100
Fb - Joint widths upto (mm)	80	100
H - Heights (mm)	35 / 40* / 50 / 55* / 60 / 80 / 100	35 / 40* / 50 / 55* / 60 / 80 / 100
B - Overall width (mm)	185 / 205*	205 / 225*
S - Visible width (mm)	100	120
Movement Total (+/- mm)	18 (+9)	24 (+12)
Material	Aluminium & Nitriflex	Aluminium & Nitriflex
Load Bearing capacity (kN)		

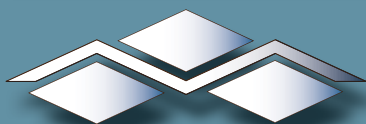

**Movement Joints (UK) Ltd,**  
Unit 3, 57 Thorby Avenue, March, Cambridgeshire PE15 0AZ United Kingdom  
Tel: 01354 60 79 60 Fax: 01354 60 78 33  
Web: [www.mjuk.co.uk](http://www.mjuk.co.uk) e-mail: [info@mjuk.co.uk](mailto:info@mjuk.co.uk)

**IMPORTANT:** Whilst all reasonable care is taken in compiling technical data on the company's products, all recommendations or suggestions regarding the use of such products are made without guarantee since the conditions of use are beyond the company. It is the customers responsibility to satisfy himself that each product is fit for the purpose for which he intends to use it and that the actual conditions of use are suitable.