


496 Series


**Intermediate Movement Joints
(Field Limitation Joints)**
For hard floor finishes e.g. terrazzo,
marble, granite, ceramics

Features:

- Attractive finish
- **Choice of aluminium, stainless steel or brass, with cellular rubber insert**
- Ideal for textured flooring finishes e.g. granite, unpolished floor finishes
- **Insert Colours:** Black, Grey or Stone
- Standard lengths:
Aluminium - 3 metre lengths
Stainless Steel - 3 metre lengths
Brass - 2.5 metre lengths
- Movement +/-2mm
- Floor to wall options
- Installation heights from 20mm to 60mm as standard.
(Alternative heights available, subject to minimum order quantity)
- Foamtail extensions (TD variation) available for deep screeds
- For use in hospitals • airports • shopping malls • exhibition halls
- Heights greater than 60mm are available, please contact for further details

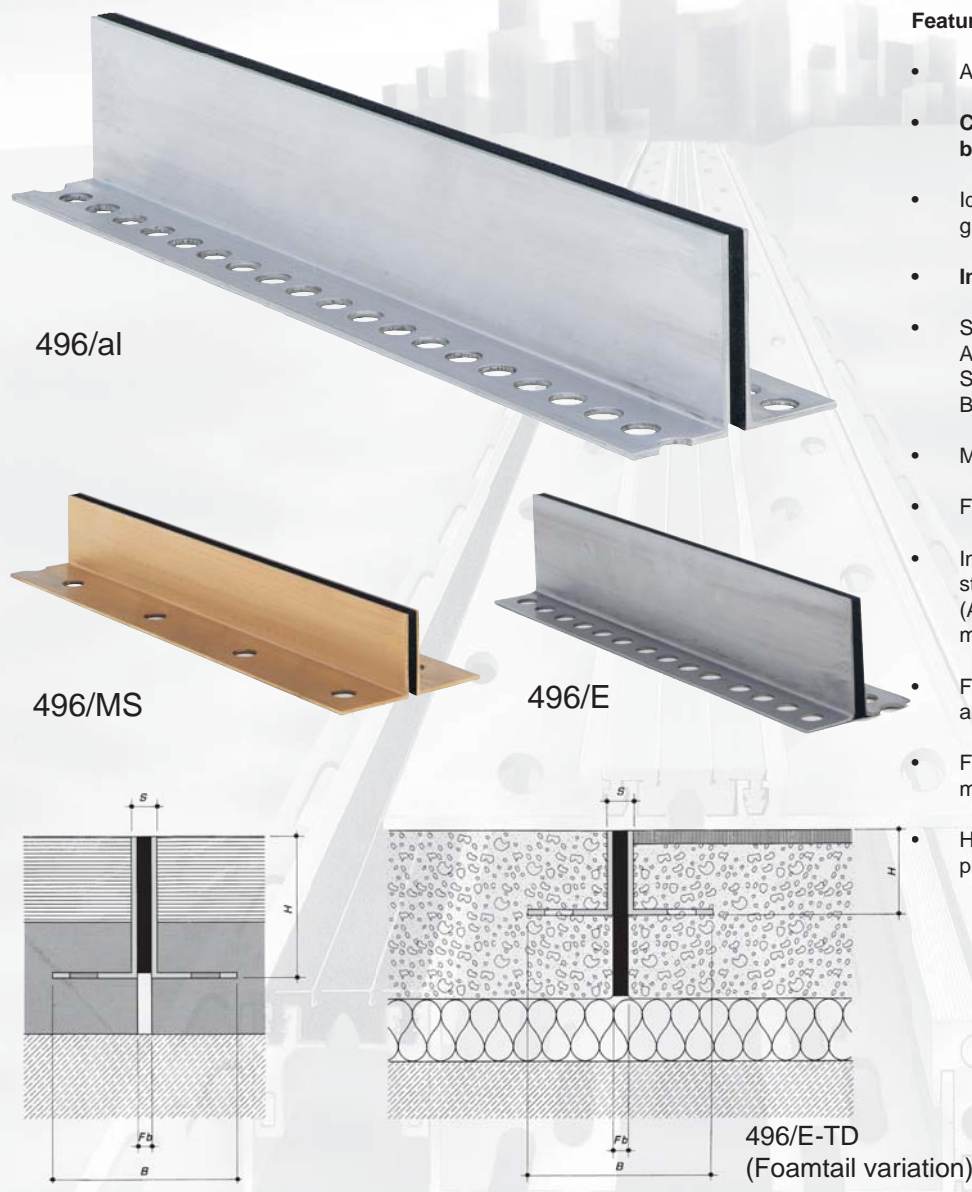

Profile reference	496/AL Aluminium	496/E Stainless Steel	496/M Brass
Fb - Joint widths upto (mm)	5mm	5mm	5mm
H - Heights (mm)	20/ 25 / 30 / 40 / 50 / 60* mm	20/ 25 / 30 / 40 / 50 / 60* mm	20/ 25 / 30 / 40 / 50 mm
B - Overall width (mm)	65mm	65mm	65mm
S - Visible width (mm)	9mm	8mm	9mm
Accommodation of movement (mm)	4 (+/- 2)mm	4 (+/- 2)mm	4 (+/- 2)mm
Load Bearing capacity (kN)			

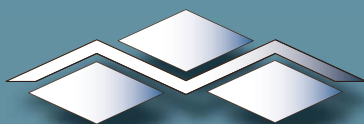

Movement Joints (UK) Ltd,
Unit 3, 57 Thorby Avenue, March, Cambridgeshire PE15 0AZ United Kingdom
Tel: 01354 60 79 60 Fax: 01354 60 78 33
Web: www.mjuk.co.uk e-mail: info@mjuk.co.uk

IMPORTANT: Whilst all reasonable care is taken in compiling technical data on the company's products, all recommendations or suggestions regarding the use of such products are made without guarantee since the conditions of use are beyond the company. It is the customers responsibility to satisfy himself that each product is fit for the purpose for which he intends to use it and that the actual conditions of use are suitable.