


# MJ SERIES

## Intermediate Movement Joints (Field Limitation Joints)

For use in  
hospitals • airports • shopping malls • exhibition halls

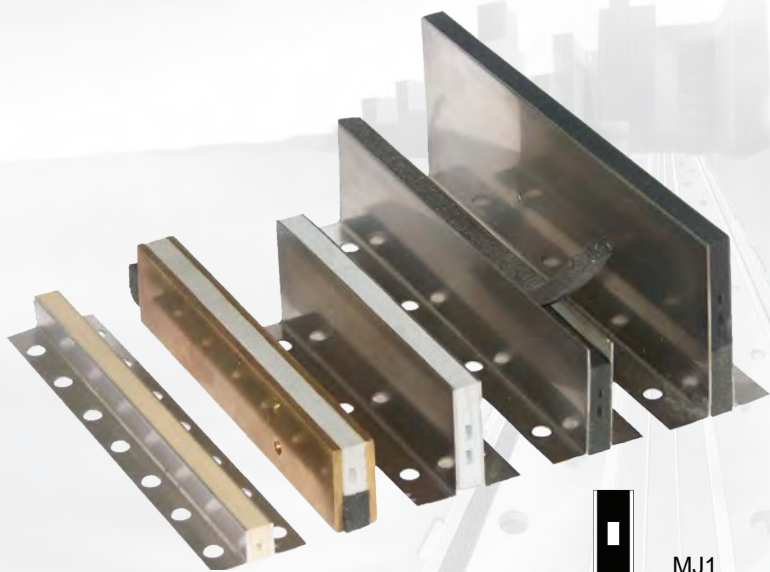

MJ1 INTERMEDIATE JOINT

**Features:**

Material Options:

- **AL** = Aluminium
- **SS** = Stainless steel
- **BR** = Brass

Central core = neoprene rubber / foam (colour black, stone or grey)

Standard 2 metre lengths, with metal thickness 1mm. Heavy duty profiles of 1.6mm and 3mm available subject to minimum order quantities.


**MJS** series available with removable foam filler piece allowing client to fill with a trafficable wet sealant to his choice of colour.

Curved pieces available to order subject to minimum radius and heights. Please contact for details.

To specify: quote profile number with suffix of metal finish required, followed by height and colour of insert

e.g. MJ1-SS , 30mm high, stone coloured insert

Vamac core option, a fire resistant / low smoke emission and is approved by L.U.L. (subject to minimum order quantity).

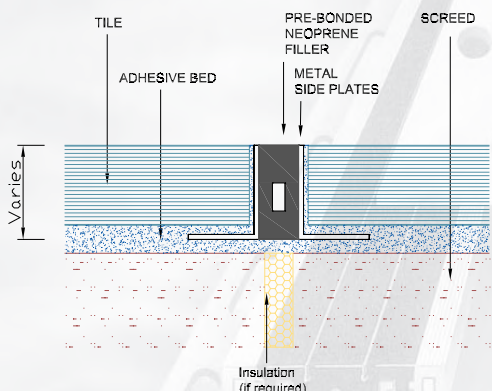

MJ1










MJ2



MJ3

MJ3 has a minimum height of 25mm

Profile reference	MJ1-AL MJ1-SS MJ1-BR	MJ2-AL MJ2-SS MJ2-BR	MJ3-AL MJ3-SS MJ3-BR
Fb - Joint widths upto (mm)	5mm	5mm	5mm
Heights (mm)	10 / 13 / 15 / 20 / 25 / 30 / 40 / 50 / 60 Alternative heights available, subject to minimum order quantity		25 / 30 / 40 / 50 / 60 Alternative heights available
S - Visible width (mm)	10.5mm	10.5mm	10.5mm
Insert Colours:	black, stone (beige) or grey	black, stone (beige) or grey	black, stone (beige) or grey
Accommodation of movement (mm)	2mm (+/-1mm)	2mm (+/-1mm)	2mm (+/-1mm)
Material	AL = Aluminium BR = Brass SS = Stainless steel Neoprene rubber insert	AL = Aluminium BR = Brass SS = Stainless steel Neoprene rubber insert	AL = Aluminium BR = Brass SS = Stainless steel Neoprene rubber insert
Load Bearing capacity (kN)	 	 	 

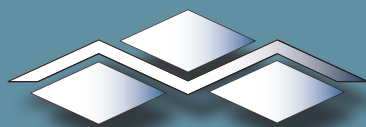

**Movement Joints (UK) Ltd,**  
Unit 3, 57 Thorby Avenue, March, Cambridgeshire PE15 0AZ United Kingdom  
Tel: 01354 60 79 60 Fax: 01354 60 78 33  
Web: www.mjuk.co.uk e-mail: info@mjuk.co.uk

**IMPORTANT:** Whilst all reasonable care is taken in compiling technical data on the company's products, all recommendations or suggestions regarding the use of such products are made without guarantee since the conditions of use are beyond the company. It is the customers responsibility to satisfy himself that each product is fit for the purpose for which he intends to use it and that the actual conditions of use are suitable.