
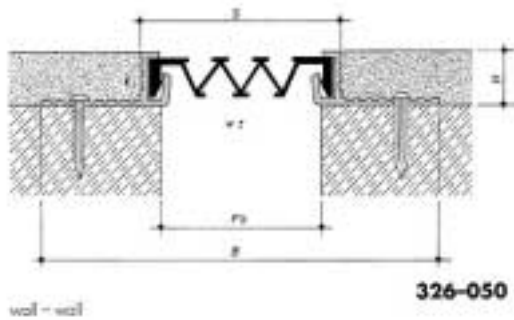


Movement Joints (UK) Ltd

P O Box 10, Wisbech, Cambridgeshire PE13 4AN
 Tel: 01945 450736 Fax: 01945 450819
 Web: www.mjuk.co.uk
 e-mail: info@mjuk.co.uk

**326 Series
 Facades, Walls &
 Ceilings**

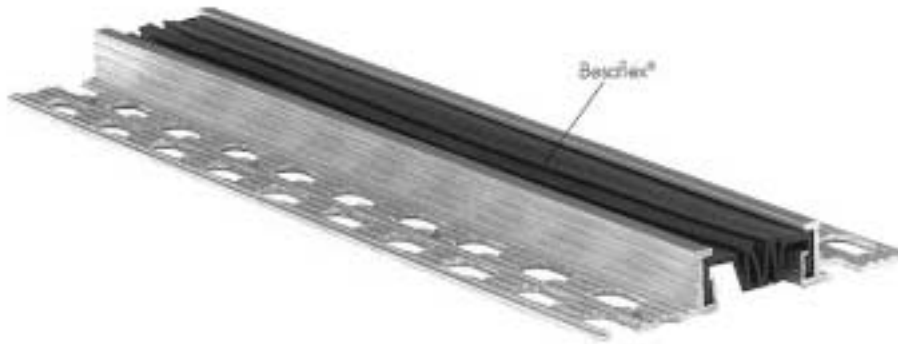

Also available as a wall/corner profile

Profile Number	326-030	326-050	326-080	326-120	326-200	326-280	326-350
Fb - Joint widths up to (mm)	30	50	80	120	200	280	350
H - Height (mm)	17	17	17	17	17	17	17
B - Overall width (mm)	100	130	160	180	280	360	430
S - Visible width (mm)	34	60	95	115	210	295	365
Accommodation of movement (mm)	10 (+8/-2)	30 (+20/-10)	45 (+30/-15)	65 (+45/-20)	90 (+50/-40)	125 (+80/-45)	150 (+100/-50)
Colours	Black, grey (other colours available upon request)						
Material	Besaflex®, aluminium						
Standard Length (metres)	4						

Applications: Facades, walls & ceilings

Profile characteristics: Aluminium side plates designed for easy render/plastering of surfaces, high movement absorption, interchangeable inserts, attractive design, ideal for areas where ground settlement is a problem

Profile installation: See tips for planning and installation

IMPORTANT

Whilst all reasonable care is taken in compiling technical data on the company's products, all recommendations or suggestions regarding the use of such products are made without guarantee since the conditions of use are beyond the company. It is the customers responsibility to satisfy himself that each product is fit for the purpose for which he intends to use it and that the actual conditions of use are suitable.

